


# ECOCLASSIC/150110

single lever basin mixer ½""
with adjustable Kerox ceramic
cartridge, with aerator, with drain
assembly pop up waste 1 ¼",
with flexible hoses
flow rate class A


chrome





# ECOCLASSIC/150110 L

Single lever basin mixer, 1/2" XL-Version, with ceramic cartridge, with jet regulator, with flexible hoses, with drain assembly pop up waste1 1/4" flow rate class A chrome










# ECOCLASSIC/150501

single lever bath/shower mixer, 1/2" adjustable ceramic cartridge, with aerator, with automatic diverter: bath/shower, with 'S'-connection, backflow prevention, flow rate class S/B, chrome






# ECOCLASSIC/ 150505

single lever shower mixer 1/2" adjustable ceramic cartridge, with 'S'-connection, backflow prevention, flow rate class A chrome











## **ECOCUT/ 160110**


single lever basin mixer 1/2"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses, flow rate class A, Chrome





single lever shower mixer ½"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses, flow rate class A chrome










# ECOCUT/ 160501

single lever bath/shower mixer, ½" adjustable ceramic cartridge, with aerator, with automatic diverter: bath/shower, with 'S'-connection, backflow prevention, flow rate class S/B chrome



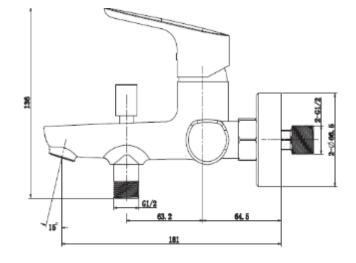






# **ECOCURVE/170110**

single lever basin mixer ½"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses,


flow rate class A

Chrome

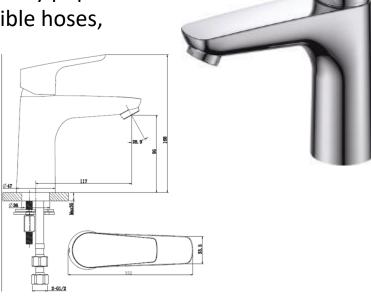

# **ECOCURVE/170505**

single lever shower mixer ½"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses, flow rate class A chrome











# **ECOCURVE/170501**

single lever bath/shower mixer, ½" adjustable ceramic cartridge, with aerator, with automatic diverter: bath/shower, with 'S'-connection, backflow prevention, flow rate class S/B chrome












# ECOCIRCLE/180110

single lever basin mixer ½"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses, flow rate class A chrome






# ECOCIRCLE/180505

single lever shower mixer ½"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses, flow rate class A












# ECOCIRCLE/180501

single lever bath/shower mixer, ½" adjustable ceramic cartridge, with aerator, with automatic diverter: bath/shower, with 'S'-connection, backflow prevention, flow rate class S/B chrome










# STARK/190110


single lever basin mixer ½"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses, flow rate class A Chrome





# STARK/190110 L

single lever basin mixer ½"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses, flow rate class A chrome









## STARK/190210

single lever bidet mixer, 1/2" with ceramic cartridge, with ball pivot aerator, with drain assembly pop up waste 1 1/4", with flexible hoses, flow rate class A chrome




# STARK/190501

single lever bath/shower mixer, 1/2" wall mounted, with adjustable ceramic cartridge, with diverter shower/bath with concealed `s´ connection backflow prevention, flow rate class B/S chrome











# STARK/190505

single lever shower mixer, 1/2" with adjustable ceramic cartridge backflow prevention with concealed 's' connection, flow rate class Schrome"











single lever basin mixer ½"" with adjustable ceramic cartridge, with aerator, with drain assembly pop up waste 1 ¼", with flexible hoses,


flow rate class Z Chrome

# SCHÖN/200110



# SCHÖN/200110 L

single lever basin mixer, 1/2" XL-Version, with ceramic cartridge, with drain assembly pop up waste 1 1/4", with flexible hoses, flow rate class Z chrome










## **SENSOR MIXERS**

## MODENA / MAWBS1


Wall mounted electronic tap for basin operated by infrared sensor. Powered by battery.



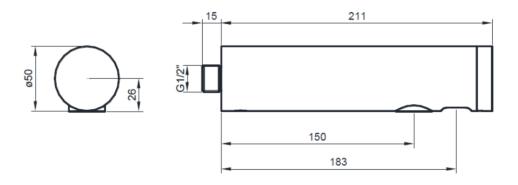

# **MODENA / MAWB1**

Electronic basin tap, operated by infrared sensor, powered by batteries










## **SENSOR MIXERS**

# **MODENA / MAWB2**


Basin tap powered by infrared sensor . Powered by mains 230V





# **MODENA/MAWB3**

Electronic basin mixer, powered by battery









## **SENSOR MIXERS**

# **MODENA / MAWB4**


Electronic basin mixer Main powered 230 V



## **BATHROOM MIXERS**

# **MODENA/MAWB5**

Basin mounted self-closing 15 SEC push button mixer, modern style










# MODENA / MAWB6


Wall mounted self-closing push button tap.

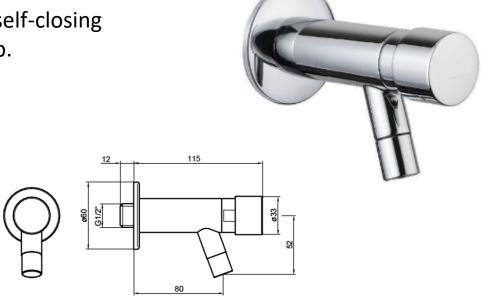

# **MODENA/MAWB7**

Stainless steel self-closing wall mounted push button basin tap 15 SEC- 3 BAR










# MODENA/MAEXT1

Extension 50 mm. length for wall self closing taps










# SNSMLL14.37X


One-hole sink mixer complete with: swiveling spout aerator M16,5x1 set of 2 stainless steel hoses 3/8"G

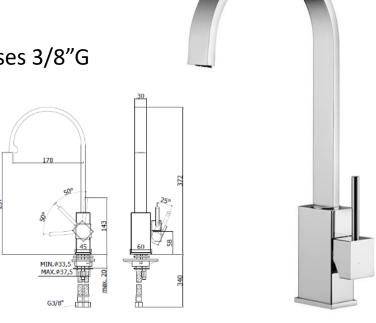

# SNSMCY14.52XB

Professional
Single-hole sink mixer
with swivel spout complete with:
Minimal shower (2 jets) in ABS
shower support with easy hooking
with magnets
set 2 flexible 3/8 "G

Chrome + Matt Black








# SNSMCF14.48X

Tall One-hole sink mixer with swiveling spout complete with:

set of 2 stainless steel hoses 3/8"G 1/2"-M10x1 / L.1500 mm nylon hose with lead Minimal (two-spray) ABS hand-shower with tube spout - Ø30mm

chrome plated





# SNSMCF14.36X


One-hole sink mixer with swiveling spout complete with:

1/2"-M10x1 / L.1500mm nylon hose with lead set of 2 stainless steel hoses 3/8"G

with (two-spray) pull out hand-shower

with tube spout - Ø30mm

chrome plated

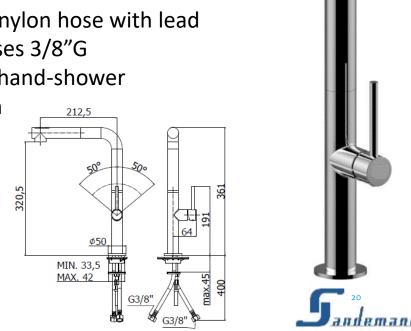



# SNSMGN14.37X


Single-hole sink mixer with swivel spout complete with:

aerator M22x1F

set 2 stainless steel flexible 3/8 "G

with tube barrel

Chrome

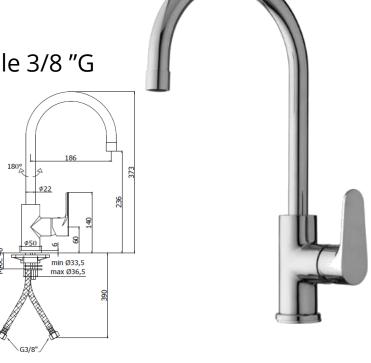


# SNSMRD14.50X

Professional
Single-hole sink mixer with swivel spout complete with:
Minimal shower (2 jets) in ABS

set 2 flexible stainless 3/8 "G

Chrome









# SNSMGN14.37X

Single-hole sink mixer with swivel spout

2 stainless steel flexible 3/8 "G set


1 stainless steel flexible hose M15x1

1 flexible nylon 1/2" G x M15x1 cm. 150

with lead


with extractable shower (2 jets) in ABS

Chrome

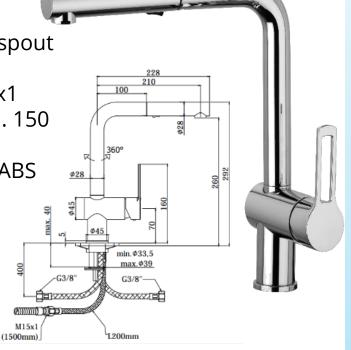


# SNSMRO14.36X

Single-hole sink mixer with adjustable barrel complete with: aerator M22x1 set 2 stainless steel flexible 3/8 "G Chrome

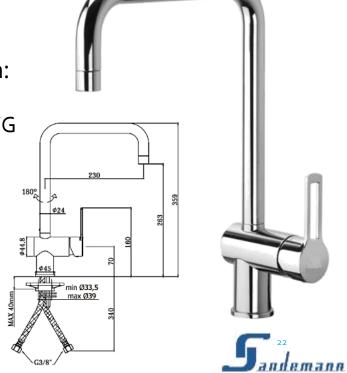



Single-hole sink mixer with: aerator M22x1F set 2 3/8 "G stainless steel flexible hoses Ø22mm swivel spout Chrome

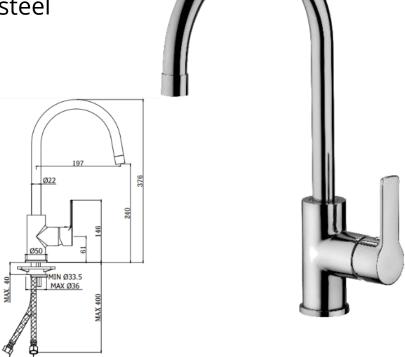

SNSMRD14.37X

# SNSMBO14.18X

197

min. Ø33.5

3/8"G

MI5xI

swivelling spout complete with: set of 2 stainless steel hoses 3/8"G
1 stainless steel hose M15x1
1/2"-M15x1 / L.1500 mm nylon hose with lead


One-hole sink mixer with





# SNSMFA14.30X

Single-hole sink mixer with swivel spout aerator M24x1 set 2 flexible 3/8 "G stainless steel with tube barrel Chrome

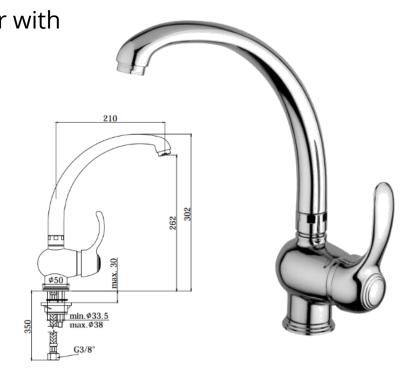






## **SM-PROC-TSHS-CY-1465CR**

Stainless steel concealed shower column complete with:

- fixed hand-shower bracket
- Premium metal hand-shower
- Silver PVC hose 1500 mm.
   with thermostatic shower mixer
   (with 3 ways diverter)
   chrome plated

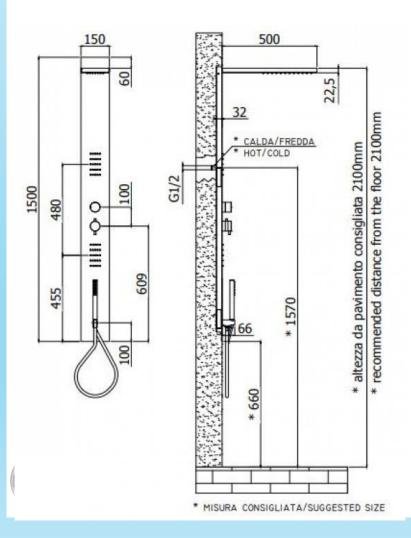




#### **SM-PROSI-RHS-BA-1462CR**

Stainless steel shower column complete with:

- fixed hand-shower bracket
- metal hand-shower
- Silver PVC hose 1500 mm with mixer (with 2 ways diverter) chrome plated

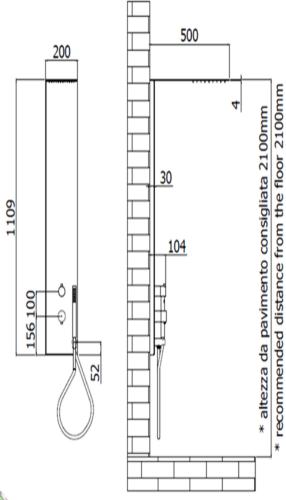










thermostatic mixer with diverter and white glass surface

- fixed brass rectangular tube
- PVC silver flexible hose 1500 mm
- white ABS material 280x280 mm
- 3 spray hand shower with spray selection by rotation of chromed grip
- Ø140 mm
- white/chrome ABS material

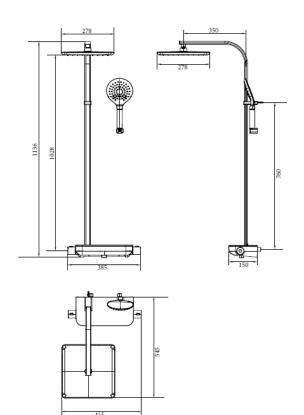








Adjustable shower column complete with:

- round sliding bracket ECO
- ABS hand-shower
- Ø225mm "Round" metal shower head
- metal flexible hose 1500 mm

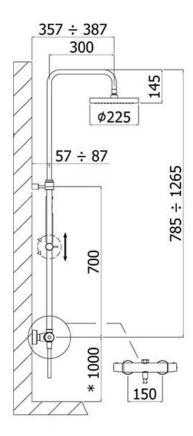









Adjustable shower column complete with:

- round sliding bracket
- ABS hand-shower
- Ø225mm "Round" metal shower head
- metal flexible hose 1500 mm



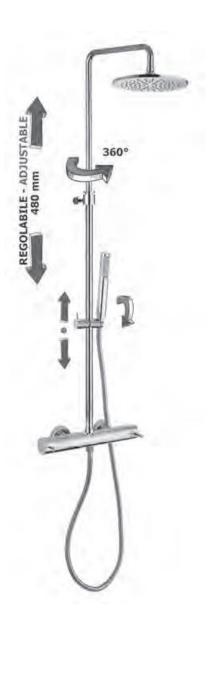





# BATHROOM SHOWER COLUMNS SM-C-CHS-BO-1460CR

Round fixed pipe
hand shower in ABS
2 removable wall brackets
Round sliding support
Shower head round Ø 230 mm metal.
Delivered with flow reducer 9I / min included.





# **BATHROOM SLIDING RAIL**


#### **SR-C-4SPBO-14.14CR**

#### Complete sliding rail:

Metal hose 1500mm

- Ø20.5 x L.730 mm metal rod
- adjustable ABS supports
- sliding metal shower support
- ABS shower, 4 jets, Ø105 mm
- 1500 mm double seam metal flex with conical cap revolving with MAX distance 692 mm chrome

Soap dish for rod Ø20.5 mm










## **BATHROOM SLIDING RAILS**

Sliding rail shower set complete with:

- with metal rod Ø20,5 x L.730 mm with L.
- 1500mm double interlock flexible hose and conical nut
- adjustable ABS wall brackets
- ABS hand shower, four-spray functions, Ø120 mm

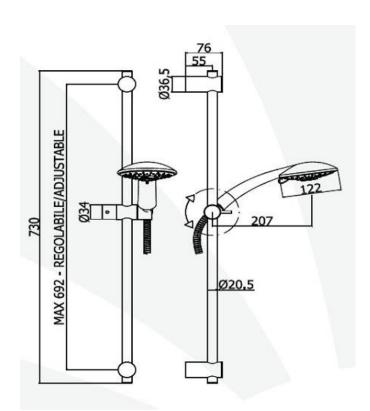








Sliding rail shower set complete with:

- fixed supports in ABS
- sliding shower support in ABS
- Trieste Bis shower in ABS, single jet, Ø80 mm
- double seam metal flex 1500 mm with swivel conical cap
- soap dish

Center distance 650 mm

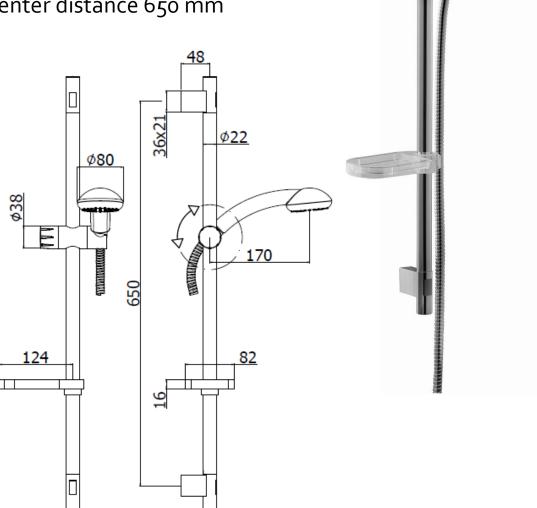






#### **BATHROOM SHOWER HEADS**

SH-R-14.50.22CR

metal shower head


antiscale system500x220mmchrome plated

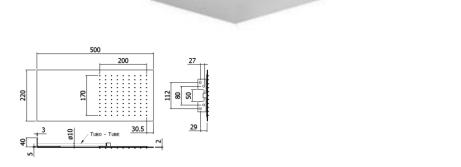

#### SH-S-14.30.30CR

Square shower head

- antiscale system
- 8mm thickness
- 1/2"G swivel 300x300mm chrome plated






#### SH-C-14.30CR

Round" metal shower head

- antiscale system
- 8mm thickness
- 1/2"G swivel joint Ø300mm chrome plated












## **BATHROOM SHOWER HEADS**

"Square" metal shower head:


- antiscale system
- ultra-thin
- 1/2"G swivel joint
- 200X200mm





"Round" metal shower head: antiscale system ultra-thin 1/2"G swivel joint Ø230mm









# **SHATTAF**

## SNSIA.55100

kit with reinforced PVC flexible hose, 120 cm and shower holder.

Available with SASO



SNSOI.55001

kit with reinforced PVC flexible hose, 120 cm and shower holder.

Available with SASO







## **SHATTAF**

Brass shattaf kit with ultraflex PVC flexible hose 120 cm , shower support

## SNSOIB.550011



SNSSA.55007

Brass shattaf kit with ultraflex PVC flexible hose 120 cm , shower support







## **SHATTAF**

## SNSNR.55009

Brass shattaf kit with ultraflex PVC flexible hose 120 cm , shower support







## **WASHBASINS**


### **SAN WB1**


70 CM: SWB-CFSMM-3370W 60 CM: SWB-CFSMM-3360W 50 CM: SWB-CFSMM-3350W


wall hung washbasin, or with pedestal, one hole/ prearranged 3 holes















### **WATER CLOSETS**


65 CM: **SWC-CFSHH-3365W** 

60 CM: SWC-CFSMM-336oW

Close-coupled toilet with wall/floor draining
Ceramic cistern monobloc
Discharge mechanism, double flow system model "G" low water plug
White

### **SAN WC1**



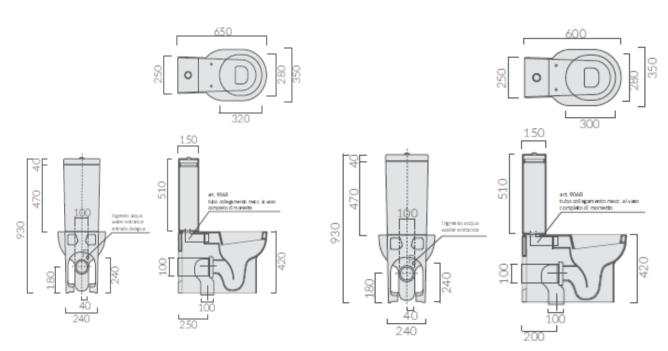





### WATER CLOSETS

### SAN WC2

55 cm: SWC-CWHMM-3355W

50 cm: SWC-CWHMM-3350W

46 cm: SWC-CWHMM-3346W


Wall hung water closet with

seat and cover

option Soft close seat


White



























## **WASHBASINS**

#### SAN WB<sub>2</sub>

**75 x 45 cm** SWB2.3375W **60 x 42 cm** SWB2.3360W


Wall-hung washbasin


1 hole pre-arranged 3 holes
Wall hung installation, fixing kit
included















## **WASHBASINS**

### SAN WB2ACC

solid oak wood structure sandblasted and matt available in White or black varnished







## **WATER CLOSETS**

### SAN WC3

SWC<sub>3</sub>NR.<sub>3353</sub>W/SWC<sub>3.3353</sub>W

53 x 36 cm


Wall hung water closet

With or without rim

Available with soft closing seat
and cover

White













## **WATER CLOSETS**

SAN WC4

SWC4.3355W

<u>55 X 35 cm</u>


Wall hung water closet


with <u>slim</u> closing seat and cover or with <u>extra slim soft</u> closing seat and cover

#### White













### **BATHTUBS**

### SNBDC40.18080 SNBDC40.17075

MODERN DESIGN, RECTANGULAR EXTERIOR SHAPE, DUO BATH WITH TWO IDENTICAL ANATOMICAL BACKRESTS AND DRAIN CENTRALLY POSITIONED TURNING IT INTO A TWO-SEATER BATH.

#### Sizes

•1800 x 800 x H415 mm/1700 x 750 x H390 mm

#### **Options**

- •Chromed handle "Fresh model"
- •Enamel Anti-Slip
- •HID Hydro-massage system
- •Inside colors: White, Black and other

sanitary colors

Matte colors: White, BlackPanel colors: White, Black

#### Installation AIDS

Metal feet

Waste valve

Taps


Bathtub furniture

Vitreous enamel steel paneling system

#### Includes

Sound insulating set already assembled Earthing strap for equipotential bonding 30 years warranty, 100% recyclable, Heavy duty performances: Resistant to

surface impacts, scratch, abrasion.

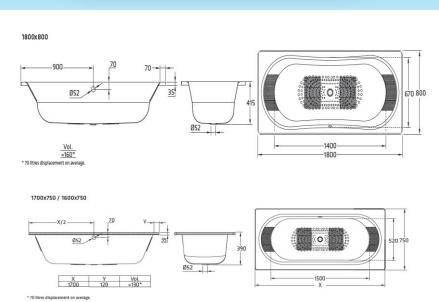







### **BATHTUBS**

### SNBUDAHG40.17075

Size length 170
Size Width 75
Type of installation recessed / attached Material stainless steel
Material Thickness 3.5mm
Country Portugal
No corner product
Hydromassage without hydromassage
30 year warranty
Depth cm 39
White color





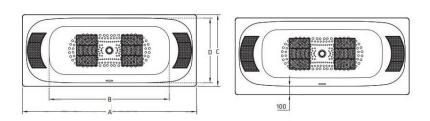





### **BATHTUBS**

## TIMELESS, CONCEPTUAL AND FUNCTIONAL DESIGN. THIS BATH CAN FIT INTO ANY STYLE OF BATHROOM.

### SNBUHG17075 SNBUHG17070 SNBUHG16070

#### Sizes

- •1700 x 750 x H390 mm
- •1700 x 700 x H390 mm
- •1600 x 700 x H390 mm

#### **Options**

- Chromed handles
- Enamel Anti-Slip
- •HID Hydro-massage system
- •Inside colors: White, Black and other sanitary colors
- •Matte colors: White, Black
- •Panel colors: White, Black
- Tap holes

#### Includes


Sound insulating set already assembled Earthing strap for equipotential bonding

#### Remarks

30 years warranty, 100% recyclable, Heavy duty performances:

Resistant to surface impacts, scratch, abrasion Proven resistance to chemical and staining



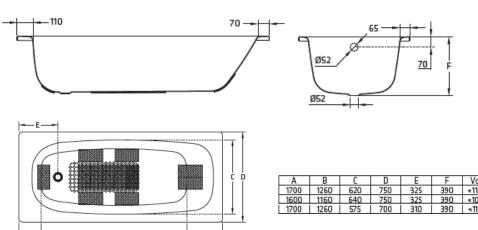






basins: 1


size: 800x500 mm

Ø hole: 3,5"

Depth: 191 mm Fitting 7 mm


Brushed finishing





### SNSCA18.8050X






## SNSAO18.8383X


basins: 2 Drainboard

Size 830x830x500 mm

Semi integrated sink

Ø hole: 3.5 " Depth: 221 mm Fitting 8 mm











#### **SNAA18.86BDX**

Built in sink
Basins 2
Size [W x H] 1160 x 500 mm
Drainboard
Ø hole 3.5"
Depth 170 mm
Fitting 4 mm
Finishing matt








#### SNSAA18.86BBX

Built in
Basins 2
size [W x H] 860x500 mm
Ø hole 3.5"
Depth 15 mm
Fitting 6 mm
Finishing matt



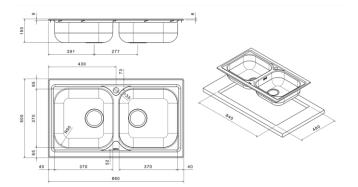






#### SNAA<sub>18</sub>.86BDX

Built in
Basins 1
Drainboard
Size [W x H] 860x500 mm
Ø hole 3.5"
Depth 155 mm
Fitting 6 mm
Finishing matt






### **SNSFA18.45X**

Undermount

size: 43.5 cm diameter

Ø hole: 3.5 " depth: 200 mm

Finishing brushed









#### Undermount

Basins: 1


Ø hole: 3.5 "


Size: 539x436 mm Depth: 200 mm


Finishing: brushed



SNSFA18.5443X







### SNSFA18.7141X


#### Undermount

Basins: 1

Ø hole: 3.5 "

Size:708x412 mm Depth: 199 mm Finishing: brushed









### SNSFA18.8951X

Undermount


basins: 2

size: 890x510 mm

Ø hole: 3.5 "

depth: 180 mm Finish: brushed



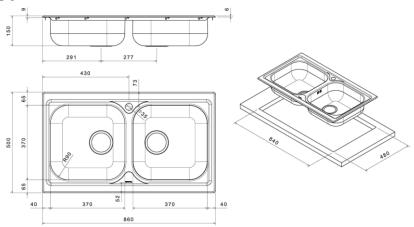

### SNSRS18.3951X

Built in

basins: 1

size: 390 x 510 mm


Ø hole: 3.5 "


depth: 200 mm


Finish: brushed















### SNSRS18.7551X

Built in

basins: 1


size: 750 X 510 mm

Ø hole: 3.5 "

depth: 200 mm

Finish: brushed





### SNSRS18.5444X

Built in

basins: 1


size: 540 X 440 mm

Ø hole: 3.5 "

depth: 200 mm

Finish: brushed









### SNSRS18.7444X

Built in

basins: 1


size: 740x440 mm

Ø hole: 3.5 "

depth: 200 mm

Finish: brushed





#### SNSLR<sub>1</sub>8.86BDX


Built in


basins: 1

size: 860x500 mm

Ø hole: 3.5 "

depth: 225 mm Finish: brushed









#### SNSLR<sub>1</sub>8.86BBX

Built in


basins: 1

size: 860 x 500 mm

Ø hole: 3.5 "

depth: 225 mm Finish: brushed





## SNSLR18.11650X

Built in


basins: 2 1 drainer


size: 1160 x 500 mm

Ø hole: 3.5 "

depth: 225 mm

Finish: brushed









### **WATER HEATERS**

# Vertical and horizontal Wall Mounted Electric Water heaters from 50 up to 200 liters 50 Hz


SWH-SFVWM1.2-3150/W5	Flange	Vertical	1200 watt	50L
SWH-SFVWM1.2-3180/W5	Flange	Vertical	1200 watt	80L
SWH-SFVWM1.5-31100/W5	Flange	Vertical	1500 watt	100L
SWH-SFHWM1.2-3150/W5	Flange	Horizontal	1200 watt	50L
SWH-SFHWM1.2-3180/W5	Flange	Horizontal	1200 watt	80L
SWH-SFHWM1.5-31100/W5	Flange	Horizontal	1500 watt	100L
·	J			
SWH-SFVWM1.5-3150/W5	Flange	Vertical	1500 watt	50L
SWH-SFVWM1.5-3180/W5	Flange	Vertical	1500 watt	80L
SWH-SFHWM1.5-3150/W5	Flange	Horizontal	1500 watt	50L
SWH-SFHWM1.5-3180/W5	Flange	Horizontal	1500 watt	80L
SWH-SFHWM2.0-31100/W5	Flange	Horizontal	2000 WATT	120 L
SWH-SFHWM2.5-31120/W5	Flange	Horizontal	2500 WATT	120 L
SWH-SFHWM2.5-31200/W5	Flange	Horizontal	2500 WATT	200 l
SWH-SSVWM1.2-3150/W5	Screw	Vertical	1200 watt	50L
SWH-SSVWM1.2-3180/W5	Screw	Vertical	1200 watt	80L
SWH-SSVWM1.5-3150/W5	Screw	Vertical	1500 watt	50L
SWH-SSVWM1.5-3180/W5	Screw	Vertical	1500 watt	80L
SWH-SSVWM1.5-31100/W5	Screw	Vertical	1500 watt	100L



	50 L	80 L	100 L	. 120 L	. 200 L
Thermal Dispersion 65° (KWh/24h)	0,98	1,32	1,51	1,84	2,41
Heating Time (Δt 50°)	170'	260'	245'	279'	348'
Max Temperature (C°)	75	5 75	5 75	5 75	5 75
Max Pressure (bar)	8	3 8	8	3 8	8
Humidity Protection	IPX4	IPX4	IPX4	IPX4	IPX4
Class Insul	1	1	I	1	I
Profile	M	M	М	L	XL
Energy Class	С	С	С	С	С

- Glass enameled inner tank.
- Thermal insulation in PU foam.
- Magnesium anode.
- Armored coppered heating element.
- Thermostat double safety.
- Security valve.
- Outer thermometer.
- 5 years warranty

MODELS	А ММ	в мм	СММ	F MM	G MM	IMM
50 L	510	460	100	130	350	130
80 L	700	460	100	130	350	130
100 L	805	460	100	130	350	130
120 L	1000	460	100	130	350	130
200 L	1105	550	140	180	350	130





### WATER HEATERS

# Vertical and horizontal Wall Mounted Electric Water heaters from 50 up to 200 liters 60 Hz

Flange Horizontal 1500 watt 80L

SWH-SFVWM1.2-3150/W6 Flange Vertical 1200 watt 50L SWH-SFVWM1.2-3180/W6 Flange Vertical 1200 watt 80L SWH-SFVWM1.5-31100/W6 Flange Vertical 1500 watt 100L SWH-SFHWM1.2-3150/W6 Flange Horizontal 1200 watt 50L SWH-SFHWM1.2-3180/W6 Flange Horizontal 1200 watt 80L SWH-SFHWM1.5-31100/W6 Flange Horizontal 1500 watt 100L SWH-SFVWM1.5-3150/W6 Flange Vertical 1500 watt 50L SWH-SFVWM1.5-3180/W6 Flange Vertical 1500 watt 80L SWH-SFHWM1.5-3150/W6 Flange Horizontal 1500 watt 50L SWH-SFHWM1.5-3180/W6 Flange Horizontal 1500 watt 80L SWH-SSVWM1.2-3150/W6 Screw Vertical 1200 watt 50L SWH-SSVWM1.2-3180/W6 Screw Vertical 1200 watt 80L SWH-SSVWM1.5-31100/W6 Screw Vertical 1500 watt 100L SWH-SSVWM1.5-3150/W6 Screw Vertical 1500 watt 50L Screw Vertical SWH-SSVWM1.5-3180/W6 1500 watt 80L Flange Horizontal 1500 watt 50L SWH-SSHWM1.5-3150/W6




	50 L	80 L	100 L
Thermal Dispersion 65° (KWh/24h)	0,98	1,32	1,51
Heating Time (Δt 50°)	170'	260'	245'
Max Temperature (C°)	75	5 75	75
Max Pressure (bar)	8	3 8	8
Humidity Protection	IPX4	IPX4	IPX4
Class Insul	I	1	1
Profile	M	M	M
Energy Class	С	С	С

SWH-SSHWM1.5-3180/W6

- Glass enameled inner tank.
- Thermal insulation in PU foam.
- Magnesium anode.
- Armored coppered heating element.
- Thermostat double safety.
- Security valve.
- Outer thermometer.
- 5 years warranty

MODELS	A MM	в мм	СММ	F MM	G MM	IMM
50 L	510	460	100	130	350	130
80 L	700	460	100	130	350	130
100 L	805	460	100	130	350	130
120 L	1000	460	100	130	350	130
200 L	1105	550	140	180	350	130





### **WATER HEATERS**

### WH-PFWM1.2-3130/W

Electric storage water heater, 30 liters, for over sink mural installation.

Glass enameled inner tank.

Thermal insulation in PU foam.

Magnesium anode

Copper heating element

Outer regulation of temperature


Security valve.

Installation kit

Working pressure: 8 Bar / Testing pressure: 16 Bar


Operating light, External regulation

5 years warranty



#### **SPECIFICATION**

Thermal Dispersion 65° (Kwh/24h)	Power Watts*	Voltage Volts	Heating Time dt 50°C	Max Temperature C°	Max Pressure (bar)	Humidity Protection	Class Insul.	Profile	Energy Class
0,70	1500	230	75′	75	8	IPX4	1	S	С

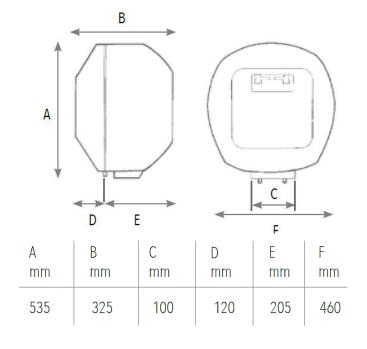





### **SOLAR PANELS**

SN42.2 SN42.3

#### THERMOSIPHON SOLAR WATER HEATERS

Solar Keymark certified
Selective solar panels with copper absorbers
Solar panel gross area = 2.03 m²
Double jacket heat-exchanger technology
Enameled hot water tank
Electric backup heating element
Complete primary solar circuit pipes and fittings
Glycol for primary circuit
5 years warranty
Solar water heater 200 L with 2 solar panels
Solar water heater 300 L with 3 solar panels









Asia and Pacific Corporation srl
Piazza Castello, 11 - 20121 Milano
- Italy | T. +39 02 86467296
www.sandemann.it